

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 148 387 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
24.10.2001 Bulletin 2001/43

(51) Int Cl.7: **G03F 7/029, G03F 7/031**

(21) Application number: **01109621.1**

(22) Date of filing: **18.04.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **19.04.2000 JP 2000117803**
01.05.2000 JP 2000131995
01.05.2000 JP 2000131996
30.11.2000 JP 2000364310
04.12.2000 JP 2000368412
05.12.2000 JP 2000369415
25.01.2001 JP 2001016537

(71) Applicant: **mitsubishi chemical
CORPORATION**
Chiyoda-ku, Tokyo 100-0005 (JP)

(72) Inventors:
• **Urano, Toshiyuki, Mitsubishi Chemical Corp.**
Yokohama-shi, Kanagawa (JP)
• **Kohori, Kazuhiro, Mitsubishi Chemical Corp.**
Yokohama-shi, Kanagawa (JP)
• **Okamoto, Hideaki, Mitsubishi Chemical Corp.**
Yokohama-shi, Kanagawa (JP)

(74) Representative:
TER MEER STEINMEISTER & PARTNER GbR
Patentanwälte,
Mauerkircherstrasse 45
81679 München (DE)

(54) **Photosensitive lithographic printing plate and method for making the printing plate**

(57) A photosensitive lithographic printing plate comprises a photosensitive layer and a protective layer formed in this order on a support, wherein the photosensitive layer has a maximum peak of spectral sensitivity within a wavelength range ranging from 390 to 430 nm, the minimum exposure for the photosensitive litho-

graphic printing plate for image formation at a wavelength of 410 nm (S410) is at most 100 $\mu\text{J}/\text{cm}^2$, and the relation between the minimum exposure for image formation at a wavelength of 450 nm (S450) and the minimum exposure for image formation at a wavelength of 410 nm (S410) is $0 < S410/S450 \leq 0.1$.

Best Available Copy

EP 1 148 387 A1

Description

[0001] The present invention relates to a photosensitive lithographic printing plate which is sensitive to a laser light having a wavelength ranging from 390 to 430 nm and which is suitable for direct drawing from digital signals of e.g. computers, and a method for making a printing plate.

[0002] Heretofore, a lithography method has been widely used for the microfabrication of e.g. lithographic printing plates, printed boards, color filters, large scale integrated circuits (LSI), thin film transistors (TFT), liquid crystal displays (LCD), plasma display panels (PDP) and semiconductor packagings (TAB), wherein an image forming material having a layer of a photosensitive composition formed on the surface of a support is image-exposed through a mask, to form a pattern which utilizes the difference in solubility of a developer between exposed portions and non-exposed portions of the photosensitive layer.

[0003] For example, a photopolymerization initiation system for the resist material for color filters, is a combination of a hexaarylbiimidazole derivative with an aminobenzophenone derivative as taught, for example, in JP-A-11-327127.

[0004] However, the resist material for color filters disclosed in JP-A-11-327127 is not intended to be exposed to laser light ranging from 390 to 430 nm, but rather is subjected through a mask to the light from the like of a high-pressure mercury-vapor lamp. Further, since the material contains a large amount of a pigment, a large quantity of energy of 200 mJ/cm², for example, is required for image formation.

[0005] Further, U.S. Patent 5,863,678 discloses a resist material for color filters containing a titanocene compound and a dialkylaminobenzene compound as a photopolymerization initiation system. The above patent discloses various kinds of light sources. However, the resist material is also exposed to light through a mask from a high pressure mercury vapor lamp source, practically, and the exposure energy of the light is high, for example 70 mJ/cm² or more.

[0006] Further, the above patent does not disclose safe light properties under a yellow lamp for a photosensitive lithographic printing plate.

[0007] On the other hand, the laser direct drawing method has attracted attention in recent years directly forming an image from digital information supplied by a computer, without using a mask, by employing a laser light as a light source for exposure, since improvement in not only productivity but resolution and accuracy of position and the like. Accordingly, the utilization of a laser light in the lithography method has been actively studied.

[0008] With respect to the laser light, various light sources emitting light from the ultraviolet to infrared region are known. Potential laser light for use in image exposure, is light in the visible to infrared region emitted by devices, such as an argon ion laser, a helium-neon laser, a YAG laser and a semiconductor laser. These devices are mentioned from the viewpoint of output, stability, photoperceptivity, cost and the like. For example, various photosensitive compositions have been proposed for use with an argon ion laser having a wavelength of 488 nm and a FD-YAG laser having a wavelength of 532 nm, and a photosensitive lithographic printing plate for exposure to light from these lasers has been placed into practical use. Examples of such photosensitive compositions are a combination of a titanocene compound with a bipyromethene complex and a combination of titanocene with a coumarin derivative as described, for example, in JP-A-11-271969.

[0009] However, no conventional compositions are known which are responsive upon exposure to a violaceous laser light having a wavelength of from 390 to 430 nm.

[0010] Further, in an image formation method utilizing such visible laser light, a photosensitive composition showing an adequate absorption at the visible region is used. However, the sensitivity of the composition to violaceous laser light having a wavelength ranging from 390 to 430 nm tends to be inadequate, and safe light properties under a yellow lamp (under environment containing a light having a wavelength of from about 500 to about 750 nm) tend to be poor in some cases, and accordingly the operation has to be conducted in a dark room environment using a red lamp.

[0011] On the other hand, JP-A-61-117549 discloses, as a photosensitive lithographic printing plate which has excellent in safe light properties, a photosensitive lithographic printing plate having a protective layer containing a specific coloring agent formed on a photopolymerizable photosensitive composition layer. It discloses as an exposure source, general-purpose light sources such as high-pressure mercury-vapor lamps and metal halide lamps, and argon ion lasers, helium-cadmium lasers and krypton lasers as well, and it discloses as a polymerization initiator a complex system of biimidazole and Michler's ketone. However, JP-A-61-117549, specifically discloses that a composition having a relative sensitivity to light of a wavelength at 480 nm when exposed to a xenon lamp, and a composition responsive to radiation energies required for image formation at 488 nm using an argon ion laser and a composition responsive to light of 442 nm the case of using a helium-cadmium laser, attracted attention. The publication discloses that no attention has been paid to compositions responsive to laser light having an oscillation wavelength of from 390 to 430 nm, particularly from 400 to 420 nm. It also discloses that a composition responsive to radiation energy required for image formation of 0.6 to 1.0 mJ/cm² to light from a helium-cadmium laser having a wavelength of 442 nm is not yet sufficient.

[0012] On the contrary, along with significant progress in laser technology in recent years, a laser emitting light in the ultraviolet region, which can operate in a bright room environment such as under a yellow lamp, particularly a

semiconductor laser which can stably oscillate in a wavelength region of from 390 to 430 nm, particularly from 400 to 420 nm, has been developed. However, no photosensitive lithographic printing plate suitable for exposure to laser within the violaceous light region (light ranging from 390 to 430 nm in wavelength) has yet been found.

[0013] Accordingly, one object of the present invention to provide a highly sensitive photosensitive lithographic printing plate which is responsive to violaceous laser light.

[0014] Another object of the present invention is to provide a method for making a printing plate using the photosensitive lithographic printing plate.

[0015] Briefly, these objects and other objects of the present invention as hereinafter will become more readily apparent can be attained by a photosensitive lithographic printing plate comprising a photosensitive layer and a protective layer formed in this order on a support, wherein the photosensitive layer has a maximum peak of spectral sensitivity within a wavelength range ranging from 390 to 430 nm, the minimum exposure for the photosensitive lithographic printing plate for image formation at a wavelength of 410 nm (S410) is at most $100 \mu\text{J}/\text{cm}^2$, and the relation between the minimum exposure for image formation at a wavelength of 450 nm (S450) and the minimum exposure for image formation at a wavelength of 410 nm (S410) is $0 < S410/S450 \leq 0.1$.

[0016] A second aspect of the present invention is a photosensitive lithographic printing plate comprising a photosensitive layer and a protective layer formed in this order on a support, the photosensitive layer containing (A) an ethylenic monomer, (B) a sensitizing pigment and (C) a radical generator, wherein the radical generator (C) contains a hexaarylbimidazole compound or a titanocene compound, and the sensitizing agent (B) contains a dialkylaminobenzene compound.

[0017] A third aspect of the present invention is a method for making a printing plate, which comprises image-exposing the photosensitive lithographic printing plate according to the first or second aspect of the present invention, by means of a laser light having a wavelength of from 390 to 430 nm, followed by development of the image by an aqueous developer.

[0018] Now, the present invention will be described in detail with reference to the preferred embodiments.

[0019] In the first aspect of the present invention, the photosensitive lithographic printing plate comprises a photosensitive layer and a protective layer formed in this order on a support, the photosensitive layer having a maximum peak of spectral sensitivity within a wavelength range ranging from 390 to 430 nm, the minimum exposure for image formation at a wavelength of 410 nm being at most $100 \mu\text{J}/\text{cm}^2$, and the ratio of the minimum exposure for image formation at a wavelength of 410 nm (S410) to the minimum exposure for image formation at a wavelength of 450 nm (S450), i.e. $S410/S450$ being at most 0.1.

[0020] The maximum peak of spectral sensitivity is more preferably within a wavelength range ranging from 400 to 420 nm. If the maximum peak of spectral sensitivity for a photosensitive composition is in a wavelength region less than the above range, the sensitivity to a laser light having a wavelength ranging from 390 to 430 nm (hereinafter sometimes referred to as a laser light in the violaceous region) tends to be poor. On the contrary, if the maximum peak of spectral sensitivity is in a wavelength region exceeding the above range, the sensitivity to laser light in the violaceous region may be high, but the safe light properties of the composition under a yellow lamp tend to be poor.

[0021] The minimum exposure for image formation of a composition at a wavelength of 410 nm is at most $100 \mu\text{J}/\text{cm}^2$, preferably at most $50 \mu\text{J}/\text{cm}^2$, more preferably at most $35 \mu\text{J}/\text{cm}^2$. If the minimum exposure is more than $100 \mu\text{J}/\text{cm}^2$, the exposure time tends to be long, such being impractical, although that depends on the exposure intensity of the laser light source.

[0022] Here, the lower the lower limit, the better, but it is usually at least $1 \mu\text{J}/\text{cm}^2$, and it is at least $2.5 \mu\text{J}/\text{cm}^2$ practically.

[0023] In the present invention, the "maximum peak of spectral sensitivity" of a composition may, for example, be determined by a method disclosed in e.g. "Photopolymer Technology" (Tsugio Yamaoka, Nikkan Kogyo Shinbunsha, 1988, page 262) as follows. Samples of a photosensitive image-forming material having a layer consisting of a photosensitive composition (a photosensitive layer) formed on the surface of a support, are irradiated with light emitted from a light source such as a xenon lamp or a tungsten lamp for exposure, using a spectral sensitivity measuring apparatus (Here, the samples are irradiated so that the exposure wavelength linearly decreases in the horizontal axis direction, and the exposure intensity logarithmically decreases in the vertical axis direction.), followed by developing the samples to obtain a resist image depending upon each exposure wavelength, whereupon the exposure energy required for image formation is calculated from the height of the image. The exposure wavelength showing the maximum peak in a spectral sensitivity curve obtained by plotting the wavelength on the horizontal axis and the inverse of the above exposure energy on the vertical axis, corresponds to the maximum peak of spectral sensitivity.

[0024] Further, the minimum exposure for image formation at a wavelength of 410 nm is determined as an exposure energy calculated from the height of the image obtained in the same manner as described above using a spectral sensitivity measuring apparatus.

[0025] Here, the minimum exposure for image formation is the minimum exposure required to form an image when the photosensitive layer is exposed and developed under optimum development conditions determined by changing,

e.g., the developer, such as by changing the pH of the developer, the development temperature or the development time depending upon the type of photosensitive composition used. The minimum exposure is usually the minimum exposure required to form an image by soaking the photosensitive layer in an alkali developer having a pH ranging from 11 to 14 at 25°C for from 30 seconds to 3 minutes after exposure.

[0026] Further, with respect to the photosensitive lithographic printing plate of the present invention, the ratio of the minimum exposure for image formation at a wavelength of 410 nm (S410: J/cm²) to the minimum exposure for image formation at a wavelength of 450 nm (S450: J/cm²) i.e. S410/S450 is at most 0.1. The value of S410/S450 is preferably at most 0.05. That is, when the minimum exposure S450 for image formation at a wavelength of 450 nm is large and the minimum exposure S410 for image formation at a wavelength of 410 nm is small, handling efficiency of the composition tends to be excellent in an environment in which the light has a wavelength in the vicinity of 500 nm, i.e. under a yellow lamp, and accordingly the smaller the above ratio, the better. Here, the minimum of S410/S450 is 0, which indicates that S450 is infinitely large. That is, the photosensitive layer is completely insensitive to a light having a wavelength of 450 nm.

[0027] Further, from the viewpoint of handling efficiency under a yellow lamp, the minimum exposure for image formation at a wavelength longer than 450 nm is preferably larger than the minimum exposure for image formation at a wavelength of 450 nm. Specifically, the minimum exposure for image formation at each of wavelength exceeding 450 nm and at most 750 nm is preferably larger than the minimum exposure for image formation at a wavelength of 450 nm (S450). It is particularly preferred that the maximum peak of spectral sensitivity within a wavelength range ranging from 390 to 430 nm of the photosensitive layer is the maximum peak of spectral sensitivity within a wavelength range ranging from 390 to 750 nm.

[0028] The above photosensitive lithographic printing plate is particularly useful when exposed to laser light having an oscillation wavelength of from 400 to 420 nm.

[0029] The constituency of the photosensitive layer in the photosensitive lithographic printing plate is not particularly limited so long as it satisfies the above definition. However, preferably a photopolymerizable composition is used which contains an ethylenic compound and a photopolymerization initiation system (a combination of a sensitizing agent with a radical generator), which has an advantage over a silver salt type photosensitive composition in view of handling efficiency in waste disposal after development or the like.

[0030] The photosensitive lithographic printing plate of the second aspect of the present invention is explained below. The photosensitive lithographic printing plate is a photosensitive lithographic printing plate containing specific constituents to achieve the physical properties of the photosensitive layer of the photosensitive lithographic printing plate of the first aspect of the present invention.

Ethylenic monomer



[0031] In the present invention, the ethylenic monomer (A) is a compound having a radically-polymerizable ethylenic double bond which undergoes addition polymerization by the action of a photopolymerization initiation system, when the photosensitive composition is irradiated with active light radiation, and which undergoes crosslinking and curing in some cases. It may be a compound having one ethylenic double bond in a molecule, and specifically, it may, for example, be an unsaturated carboxylic acid such as acrylic acid, methacrylic acid (hereinafter (meth)acrylic), crotonic acid, isocrotonic acid, maleic acid, itaconic acid or citraconic acid, an alkyl ester thereof, (meth)acrylonitrile, (meth)acrylamide or styrene. However, preferred is a compound having at least two ethylenic double bonds in a molecule from the viewpoint of polymerizability, crosslinking properties and the resulting increase in difference in solubility in a developer of the exposed portions and non-exposed portions of a photosensitive composition.

[0032] Suitable ethylenic monomers include (A-1) an ester of an unsaturated carboxylic acid with an aliphatic polyhydroxyl compound, (A-2) a phosphate containing an acryloyloxy group or a methacryloyloxy group, (A-3) a urethane (meth)acrylate or (A-4) an epoxy (meth)acrylate.

[0033] The ester of an unsaturated carboxylic acid with an aliphatic polyhydroxyl compound (A-1) may be an ester of the above-mentioned unsaturated carboxylic acid with an aliphatic polyhydroxyl compound such as ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, trimethylene glycol, 1,3-butanediol, tetraethylene glycol, neopentyl glycol, hexamethylene glycol, trimethylolethane, trimethylolpropane, glycerol, pentaerythritol, dipentaerythritol or sorbitol. Specific examples of the ester include ethylene glycol di(meth)acrylate, diethylene glycol di(meth)acrylate, triethylene glycol di(meth)acrylate, tetraethylene glycol di(meth)acrylate, propylene glycol di(meth)acrylate, 1,3-butanediol di(meth)acrylate, tetramethylene glycol di(meth)acrylate, neopentyl glycol di(meth)acrylate, hexamethylene glycol di(meth)acrylate, trimethylolethane tri(meth)acrylate, tetramethylolethane tri(meth)acrylate, trimethylolpropane tri(meth)acrylate, glycerol di(meth)acrylate, glycerol tri(meth)acrylate, pentaerythritol di(meth)acrylate, pentaerythritol tri(meth)acrylate, pentaerythritol tetra(meth)acrylate, dipentaerythritol di(meth)acrylate, dipentaerythritol tetra(meth)acrylate, dipentaerythritol penta(meth)acrylate, dipentaerythritol hexa(meth)acrylate, sorbitol tri(meth)acrylate, sorbitol tetra(meth)acrylate, sorbitol penta(meth)acrylate and sorbitol hexa(meth)acrylate, and similar

crotonates, isocrotonates, maleates, itaconates and citraconates.

[0034] The phosphate containing an acryloyloxy group or a methacryloyloxy group (A-2) embodiment is not particularly limited so long as it is a phosphate compound having a (meth)acryloyloxy group in its structure. Particularly preferred phosphates are those represented by the following formulas (Ia) or and (Ib):



wherein R¹ is a hydrogen atom or a methyl group, n is an integer ranging from 1 to 25, and m is 1, 2 or 3.

[0035] Here, n preferably ranges from 1 to 10, particularly preferably from 1 to 4, and specific examples include methacryloyloxy ethyl phosphate, bis(methacryloyloxy ethyl)phosphate and methacryloyloxy ethylene glycol phosphate. These compounds may be used alone or as a mixture.

[0036] The urethane (meth)acrylate (A-3) may, for example, be a urethane (meth)acrylate of a polyisocyanate compound such as an aliphatic polyisocyanate such as hexamethylene diisocyanate or trimethylhexamethylene diisocyanate, an alicyclic polyisocyanate such as cyclohexane diisocyanate or isophorone diisocyanate or an aromatic polyisocyanate such as tolylene diisocyanate, xylylene diisocyanate or diphenylmethane diisocyanate, with an unsaturated hydroxyl compound such as hydroxymethyl (meth)acrylate, hydroxyethyl (meth)acrylate, glycerol di(meth)acrylate, pentaerythritol tri(meth)acrylate or tetramethylethane tri(meth)acrylate. Specifically, hexamethylene bis[(meth)acryloyloxy methylurethane], hexamethylene bis[(meth)acryloyloxy ethylurethane], hexamethylene bis[tris(meth)acryloyloxymethyl] methylurethane or hexamethylene bis[tris(meth)acryloyloxymethyl] ethylurethane may, for example, be mentioned.

[0037] The epoxy (meth)acrylate (A-4) may, for example, be an epoxy (meth)acrylate of a polyepoxy compound such as (poly)ethylene glycol polyglycidyl ether, (poly)propylene glycol polyglycidyl ether, (poly)tetramethylene glycol polyglycidyl ether, (poly)pentamethylene glycol polyglycidyl ether, (poly)neopentyl glycol polyglycidyl ether, (poly)hexamethylene glycol polyglycidyl ether, (poly)trimethylolpropane polyglycidyl ether, (poly)glycerol polyglycidyl ether or (poly)sorbitol polyglycidyl ether, with a hydroxy (meth)acrylate compound such as hydroxymethyl (meth)acrylate or hydroxyethyl (meth)acrylate.

[0038] Further, another ethylenic monomer may, for example, be an ester of an unsaturated carboxylic acid with an aromatic polyhydroxyl compound such as hydroquinone di(meth)acrylate, resorcin di(meth)acrylate or pyrogallol tri(meth)acrylate, a (meth)acryhydroxyl compound such as a (meth)acryloyl ethylene oxide addition product of ethylene glycol or a (meth)acryloyl diethylene oxide addition product of 2,2-bis(4-hydroxyphenyl)propane, or a condensate of a polyhydroxyl compound, an unsaturated carboxylic acid and a polyhydric carboxylic acid, such as a condensate of ethylene glycol, (meth)acrylic acid and phthalic acid, a condensate of diethylene glycol, (meth)acrylic acid and maleic acid, a condensate of pentaerythritol, (meth)acrylic acid and terephthalic acid, or a condensate of butanediol, glycerol, (meth)acrylic acid and adipic acid. Further, an amide of the above-mentioned unsaturated carboxylic acid with an aliphatic polyamine compound such as methylene diamine, ethylene diamine, diethylene triamine or hexamethylene diamine, specifically, methylene bis(meth)acrylamide, ethylene bis(meth)acrylamide, diethylene triamine tris(meth)acrylamide or hexamethylene bis(meth)acrylamide may, for example, be mentioned.

[0039] A preferred ethylenic monomers is a (meth)acryloyloxy group-containing phosphate, and the content of the (meth)acryloyloxy group-containing phosphate in the photosensitive composition preferably ranges from 1 to 60 wt%, particularly preferably from 2 to 40 wt%, based on the entire ethylenic monomer content of the photosensitive layer. Within this range, exposure sensitivity and printing resistance of the photosensitive layer tend to improve, and developing properties of the composition tend to improve (stain at a non-image portion will decrease).

[0040] Another preferred ethylenic monomer is urethane (meth)acrylates, and among the urethane (meth)acrylates, a urethane compound (a3) having at least four urethane linkages [-NH-(C=O)-O-] and at least four addition-polymerizable double bonds in one molecule is preferred. The method of producing the urethane compound is not particularly limited, but preferably a compound (a1) having at least four active isocyanate groups in one molecule is reacted with

a compound (a2) having at least one hydroxyl group and at least two addition-polymerizable double bonds in one molecule, since a urethane linkage can easily be formed by the addition reaction of an isocyanate group (-N=C=O) with a hydroxyl group.

[0041] As to the question of why a composition exhibits improved sensitivity by the addition of the urethane type compound (a3) to a composition, the following may be considered. For example, the formation of active urethane radicals, because of a chain transfer reaction or photopolymerization of multi-functional acrylate groups in the urethane type compound (a3), induces a high photo-setting action, and this photo-setting action is increased by the high molecular weight of the urethane compound (a3).

[0042] Compound (a1) having at least four active isocyanate groups in one molecule may, for example, be a compound having at least four active isocyanate groups in the molecule which are introduced by the reaction of a compound having at least two alcoholic hydroxyl groups (hereinafter referred to as polyhydric alcohol) with a compound having at least two isocyanate groups. Specific examples of compound (a1) are prepared by reacting a compound having at least four alcoholic hydroxyl groups in one molecule such as pentaerythritol or polyglycerol with a diisocyanate compound such as hexamethylene diisocyanate, toluene diisocyanate, isophorone diisocyanate or trimethyl hexamethylene diisocyanate; or a compound prepared by reacting a compound containing at least two alcoholic hydroxyl groups in one molecule such as ethylene glycol with a compound containing at least three isocyanate groups in one molecule such as a biuret compound including Duranate 24A-100, 22A-75PX, 21S-75E and 18H-70B manufactured by Asahi Chemical Industry Co., Ltd. or an adduct compound including P-301-75E, E-402-90T and E-405-80T manufactured by Asahi Chemical Industry Co., Ltd.

[0043] Further, a compound having at least four isocyanate groups on the average in one molecule may be prepared by homopolymerization of an isocyanate of ethylmethacrylate or by copolymerization of the compound with another component. Specific examples of the compound (a1) having at least four isocyanate groups in one molecule include Duranate ME20-100 (trade name, manufactured by Asahi Chemical Industry Co., Ltd.)

[0044] The number of isocyanate groups in compound (a1) is preferably at least 6, particularly preferably at least 7. If the number of isocyanate groups is less than 4, the sensitivity of the resulting composition tends to be poor. The upper limit of isocyanate groups is not particularly limited, but if the number is too high, synthesis tends to be difficult, and accordingly the number of isocyanate units is preferably at most 20. The number of the isocyanate groups may be adjusted by the number of hydroxyl groups in the polyhydric alcohol, the type of compound having at least two isocyanate groups and the blending ratio.

[0045] The molecular weight of compound (a1) is usually at least 500, preferably at least 1,000, and at most 200,000, preferably at most 150,000. If the molecular weight is beyond this range, sensitivity of the photosensitive composition tends to decrease.

[0046] Compound (a2) having at least one hydroxyl group and at least two addition-polymerizable double bonds in one molecule, constituting urethane compound (a3), may, for example, be a compound having at least one alcoholic hydroxyl group, prepared by esterification of a compound having a plurality of alcoholic hydroxyl groups such as a polyhydric alcohol with a compound containing a carboxyl group and a (meth)acryloyl group, i.e. a reaction product prepared by reacting the above carboxyl group-containing compound in such a proportion that at least one alcoholic hydroxyl group remains. More specifically, compound (a2) may be a hydroxyl group-containing multi-functional acrylate compound having at least one alcoholic hydroxyl group, which is an ester of a polyhydric alcohol with acrylic acid, such as a compound prepared by reaction of 3 mols of acrylic acid with 1 mol of pentaerythritol, a compound prepared by reaction of 2 mols of acrylic acid with 1 mol of pentaerythritol, a compound prepared by reaction of 5 mols of acrylic acid with 1 mol of dipentaerythritol, or a compound prepared by reaction of 4 mols of acrylic acid with 1 mol of dipentaerythritol, and specific examples include pentaerythritol triacrylate, pentaerythritol diacrylate, dipentaerythritol diacrylate, dipentaerythritol triacrylate, dipentaerythritol tetraacrylate and dipentaerythritol pentaacrylate. Such a compound may be used alone or as a mixture in a photosensitive composition.

[0047] Other examples of compound (a2) include the reaction product of a compound containing an epoxy group such as glycidyl methyl ether with a compound having at least one carboxyl group and at least one addition-polymerizable double bond; a reaction product of a compound having at least one epoxy group and at least one addition-polymerizable double bond with a compound containing at least one carboxyl group; and a reaction product of a compound having at least one carboxyl group and at least one addition-polymerizable double bond with a compound having at least one epoxy group and at least one addition-polymerizable double bond. An example of such a reaction product is the reaction product of glycidyl methacrylate with (meth)acrylic acid.

[0048] Preferred compounds (a2) are those which have at least three addition-polymerizable double bonds, in view of the sensitivity of product photosensitive compositions.

[0049] The reaction of compound (a1) with compound (a2), i.e. the reaction of the isocyanate group in compound (a1) with the hydroxyl group in compound (a2), to prepare the urethane compound (a3), may be conducted in accordance with a known method. Specifically, the isocyanate group in compound (a1) and the hydroxyl group in compound (a2) are reacted in a proportion of 1/10 to 10. For example, both compounds can be dissolved in an organic solvent

such as toluene or ethyl acetate, followed by heating the solution at a temperature ranging from 10 to 150°C for 5 minutes to 30 hours. Another suitable method requires the addition of a catalyst such as n-butyl tin dilaurate in a required amount to a solution of the reactants. Still another method is to first dilute compound (a2) in a proper organic solvent and then dropwise add compound (a1) thereto. Yet another satisfactory method is the reverse

[0050] The molecular weight of urethane compound (a3) is preferably at least 600. If it is at most 600, the layer consisting of the photosensitive composition (non-cured film) tends to exhibit poor fastness. On the other hand, the upper limit is not particularly limited, but it is preferably at most 150,000 in view of ease of synthesis and availability. The molecular weight may be adjusted on the basis of the types of compounds (a1) and (a2) and the degree of esterification.


[0051] Urethane compound (a3) has at least four addition-polymerizable double bonds in view of the desired sensitivity of the product photosensitive composition, but it has more preferably at least six, particularly preferably at least eight, double bonds.

[0052] The urethane type compound (a3) may be used alone or as a mixture. Particularly when the material of the urethane compound is a mixture, the urethane compound (a3) is used as a mixture of reaction products.

[0053] In the production of urethane compound (a3), a functional group other than the addition-polymerizable double bond may be introduced into the molecule for the purpose of controlling various properties of the photosensitive composition. For example, a compound (a4) having a hydroxyl group and a carboxyl group in one molecule in combination with compound (a2) may be reacted with compound (a1) to prepare a compound having at least four urethane linkages, at least four addition-polymerizable double bonds and a carboxyl group in one molecule.

[0054] More specifically, a compound (a1') having at least four isocyanate groups in one molecule, a compound (a2') having one hydroxyl group and two addition-polymerizable double bonds in one molecule and a compound (a4') having one hydroxyl group and one carboxyl group in one molecule may be reacted at a molar ratio of a1':a2':a4' of 1:3:1 to produce a compound (a3') having four urethane linkages, and six double bonds and one carboxyl group on the average, in one molecule.

[0055] As the compound (a4) for reaction with compound (a1) in combination with compound (a2) (the compound having a hydroxyl group and a carboxyl group in one molecule), specifically, an aliphatic carboxylic acid having a hydroxyl group, such as 2-hydroxyoctanoic acid, 2-hydroxyhexanoic acid, 2-hydroxydecanoic acid, 3-hydroxyoctanoic acid or 8-hydroxyoctanoic acid, is preferred, and a C₄₋₂₀ carboxylic acid having a hydroxyl group at the α-position of the carboxylic acid is particularly preferred. As the urethane compound (a3), preferred is a urethane compound represented by the following formula (II):




wherein x is an integer ranging from 4 to 20, y is an integer ranging from 0 to 15, z is an integer ranging from 1 to 15, Ra is a group having a repeating unit derived from alkyleneoxy or arylenoxy, and having from 4 to 20 oxy groups which are capable of combining with Rb, each of Rb and Rc which are independent of each other, is a C₁₋₁₀ alkylene group, and Rd is an organic residue having from one to ten (meth)acrylic group, provided that each of Ra, Rb, Rc and Rd which are independent of one another, may have a substituent.


[0056] The alkyleneoxy group which is present in the repeating unit in Ra, may be an alkyleneoxy residue of, e.g. glycerol, pentaerythritol or propylene triol, and the arylenoxy group which is present in the repeating unit in Ra, may be a phenoxy residue of, e.g. pyrogallol or 1,3,5-benzene triol.

[0057] It is preferred that x be an integer ranging from 4 to 15, y be an integer ranging from 1 to 10, z be an integer ranging from 1 to 10, each of Ra and Rc which are independent of each other, is a C₁₋₅ alkylene group, and Rd is an organic residue having from one to seven (meth)acrylic groups.


[0058] More preferably, Ra is



wherein k is from 2 to 10, each of Rb and Rc, which are independent of each other, is $-\text{C}_2\text{H}_4-$, $-\text{CH}_2-\text{C}(\text{CH}_3)-$ or $-\text{C}_3\text{H}_6-$, and Rd is

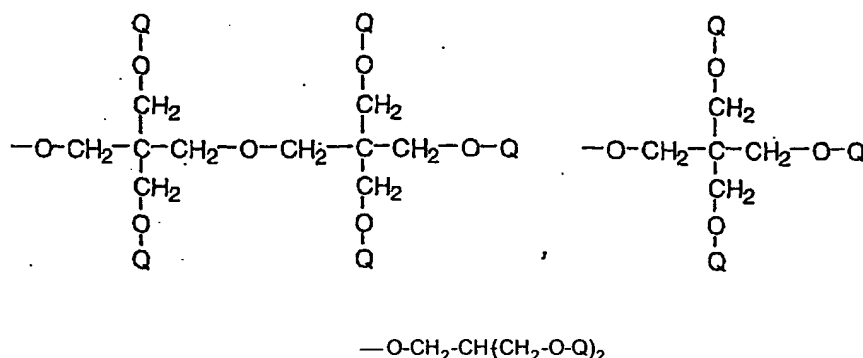

(wherein Q is



[0059] The compounding ratio of urethane compound (a3) ranges from 0.5 to 50 parts by weight, preferably from 1 to 40 parts by weight, more preferably from 2 to 30 parts by weight, based on 100 parts by weight of the ethylenic monomer.

Photopolymerization initiation system

[0060] The photopolymerization initiation system usually contains a radical generator (C) and a sensitizing agent (B) and further contains a hydrogen-donor compound as a polymerization accelerator as the case requires. The radical generator (C) is a compound which receives light excitation energy from the sensitizing agent (B) when the sensitizing agent is irradiated with active light radiation, generates active radicals by the absorbed energy, and causes the above ethylenic monomer to undergo polymerization. The components of the photosensitive layer of the photosensitive lithographic printing plate of the second aspect of the present invention comprise a hexaarylbiimidazole compound or a titanocene compound as the radical generator (C), and a dialkylaminobenzene compound as the sensitizing agent (B).

[0061] The hexaarylbiimidazole compound may be a dimer of an imidazole compound having three aryl groups which generates radicals directly by exposure to a laser ranging in wavelength from 390 to 430 nm or by interaction with the copresent sensitizing agent. The hexaarylbiimidazole compound may, for example, be a hexaarylbiimidazole compound as disclosed in, e.g. JP-B-45-37377, JP-A-47-2528 or JP-A-54-15529, and specifically, it may, for example, be 2,2'-bis(o-chlorophenyl)-4,4',5,5'-tetraphenyl biimidazole, 2,2'-bis(o-chlorophenyl)-4,4',5,5'-tetra(p-methoxyphenyl)biimidazole, 2,2'-bis(o-chlorophenyl)-4,4',5,5'-tetra(p-methylphenyl)biimidazole, 2,2'-bis(o-chlorophenyl)-4,4',5,5'-tetra(p-ethoxycarbonylphenyl)biimidazole, 2,2'-bis(o-chlorophenyl)-4,4',5,5'-tetra(p-fluorophenyl)biimidazole, 2,2'-bis(o-bromophenyl)-4,4',5,5'-tetra(p-iodophenyl)biimidazole, 2,2'-bis(o-chlorophenyl)-4,4',5,5'-tetra(p-chloronaphthyl)biimidazole, 2,2'-bis(o-chlorophenyl)-4,4',5,5'-tetra(p-chlorophenyl)biimidazole, 2,2'-bis(o-bromophenyl)-4,4',5,5'-tetra(p-chlor-p-methoxyphenyl)biimidazole, 2,2'-bis(o-chlorophenyl)-4,4',5,5'-tetra(o,p-dichlorophenyl)biimidazole, 2,2'-bis(o-chlorophenyl)-4,4',5,5'-tetra(o,p-dibromophenyl)biimidazole, 2,2'-bis(o-bromophenyl)-4,4',5,5'-tetra(o,p-dichlorophe-

nyl)biimidazole, or 2,2'-bis(o,p-dichlorophenyl)-4,4',5,5'-tetra(o,p-dichlorophenyl)biimidazole. Of these compounds, preferred is a hexaphenylbiimidazole compound. A particularly preferred hexaphenylbiimidazole compound is one which has the ortho-positions of the benzene rings at the 2,2'-positions on the imidazole rings substituted by halogen, and still more preferred is one which in addition has the benzene rings at the 4,4',5,5'-positions on the imidazole rings not substituted, substituted by halogen or substituted by alkoxycarbonyl.


[0062] Such a hexaarylbiimidazole may be used in combination with various biimidazoles as the case requires. The biimidazoles can easily be synthesized by the method disclosed in Bull. Chem. Soc. Japan. 33,565 (1960) or J. Org. Chem. 36[16]2262 (1971).

[0063] Suitable titanocene compounds include titanium compounds having a dicyclopentadienyl structure and a biphenyl structure, such as dicyclopentadienyl titanium dichloride, dicyclopentadienyl titanium bisphenyl, dicyclopentadienyltitanium bis(2,4-difluorophenyl), dicyclopentadienyl titanium bis(2,6-difluorophenyl), dicyclopentadienyl titanium bis(2,4,6-trifluorophenyl), dicyclopentadienyl titanium bis(2,3,5,6-tetrafluorophenyl), dicyclopentadienyl titanium bis(2,3,4,5,6-pentafluorophenyl), di(methylcyclopentadienyl) titanium bis(2,6-difluorophenyl), di(methylcyclopentadienyl) titanium bis(2,3,4,5,6-pentafluorophenyl) or dicyclopentadienyl titanium bis[2,6-difluoro-3-(1-pyrrolyl)phenyl], may, for example, be mentioned, and a preferred compound is one having the o-positions of the biphenyl ring replaced with a halogen atom.


[0064] Further, it is possible to use, as a radical generator, the above hexaarylbiimidazole compound and the titanocene compound in combination.

[0065] The dialkylaminobenzene type compound which is used as the sensitizing agent (B) may have any optional substituent so long as it is a compound which has a dialkylaminobenzene structure, absorbs light having a wavelength ranging from 390 to 430 nm, and efficiently generates radicals from the radical generator by interaction with the radical generator. Preferred is a dialkylaminobenzophenone compound, a dialkylaminobenzene compound having an aromatic heterocyclic group as a substituent on the carbon atom at the p-position relative to the amino group on the benzene ring, or a compound having a nitrogen-containing heterocyclic structure formed by linkage of the alkyl groups constituting the dialkylamino group in said compound and/or by linkage of said alkyl group with the carbon atom on the benzene ring adjacent to the carbon atom to which the amino group is bonded. Here, the amino groups constituting the dialkylamino group may be the same or different, and have a carbon number preferably ranging from 1 to 6.

[0066] Of these compounds, particularly preferred are dialkylaminobenzene compounds represented by the following formulae (IIIa) and (IIIb):

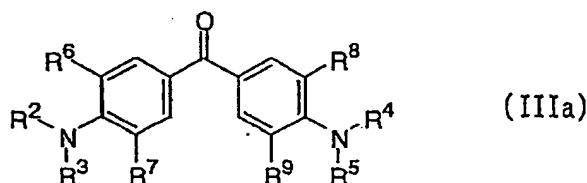

wherein each of R² to R⁵, which are independent of one another, is a C₁₋₆ alkyl group, and each of R⁶ to R⁹ is a hydrogen atom or a C₁₋₆ alkyl group, provided that R² and R³, R⁴ and R⁵, R² and R⁶, R³ and R⁷, R⁴ and R⁸, or R⁵ and R⁹, may be bonded to each other to form a ring;



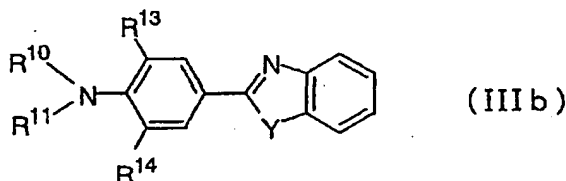


wherein each of R¹⁰ and R¹¹, which are independent of each other, is a C₁₋₆ alkyl group, each of R¹³ and R¹⁴ which are independent of each other, is a hydrogen atom or a C₁₋₆ alkyl group, Y is a sulfur atom, an oxygen atom, dialkylmethylene or -N(R¹⁵)-, and R¹⁵ is a hydrogen atom or a C₁₋₆ alkyl group, provided that R¹⁰ and R¹¹, R¹⁰ and R¹³, or R¹¹ and R¹⁴, may be bonded to each other to form a ring. Here, the carbon number of each alkyl group in the dialkyl-


methylene ranges from 1 to 6, preferably 1.

[0067] In a case where a pair of two of R^2 to R^{14} is bonded to form a ring, preferred is a 5- or 6-membered ring, and particularly preferred is a 6-membered ring.

[0068] Suitable compounds represented by formula (IIIa), include 4,4'-dimethylaminobenzophenone, 4,4'-diethylaminobenzophenone and the following compounds:

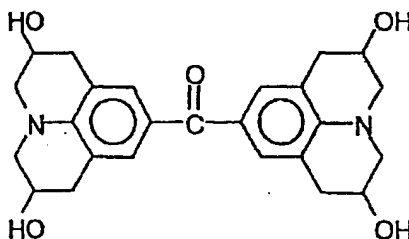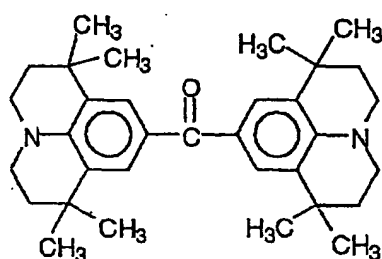

[0069] The compound having formula (IIIb) may be 2-(p-dimethylaminophenyl)benzoxazole, 2-(p-diethylaminophenyl)benzoxazole, 2-(p-dimethylaminophenyl)benzo[4,5]benzoxazole, 2-(p-dimethylaminophenyl)benzo[6,7]benzoxazole, 2,5-bis(p-diethylaminophenyl)1,3,4-oxazole, 2-(p-dimethylaminophenyl)benzothiazole, 2-(p-diethylaminophenyl)benzothiazole, 2-(p-dimethylaminophenyl)benzimidazole, 2-(p-diethylaminophenyl)benzimidazole or the following compound:




[0070] As a dialkylaminobenzene compound other than those of the formulae (IIIa) and (IIIb), 2,5-bis(p-diethylami-

nophenyl)1,3,4-thiadiazole, (p-dimethylaminophenyl)pyridine, (p-diethylaminophenyl)pyridine, 2-(p-dimethylaminophenyl) quinoline, 2-(p-diethylaminophenyl)quinoline, 2-(p-dimethylaminophenyl)pyrimidine or 2-(p-diethylaminophenyl)pyrimidine may, for example, be mentioned.

[0071] Here, in view of the important factor of the handling efficiency of a photosensitive composition under a yellow lamp, particularly in order that the ratio of S410/S450 is at most 0.1, preferred is a photopolymerization initiation system consisting of a combination of the hexaarylbiimidazole compound as the radical generator (C) with the dialkylaminobenzene compound as the sensitizing agent (B).

[0072] Further, the photosensitive composition of the present invention, which is to be exposed to violaceous light, preferably contains a hydrogen-donor compound component as a polymerization accelerator in addition to the above components, for the purpose of improving photopolymerization initiation performance.

[0073] Specific examples of the hydrogen-donor compound include compounds having a mercapto group such as 2-mercaptobenzothiazole, 2-mercaptobenzimidazole, 2-mercaptobenzoxazole and 3-mercapto-1,2,4-triazole, N,N-di-alkyl benzoic alkyl ester, N-aryl- α -amino acids, their salts and esters such as N-phenylglycine, salts of N-phenylglycine, and alkyl esters of N-phenylglycine such as N-phenylglycine ethyl ester and N-phenylglycine benzyl ester, and compounds represented by the following formula (IV):



wherein R¹⁶ is a hydrogen atom or an alkyl group which may have a substituent, R¹⁷ is a hydrogen atom, an alkyl group which may have a substituent, a vinyl group which may have a substituent, an aryl group which may have a substituent, a (meth)acryloyl group which may have a substituent, an aryl group which may have a substituent or an aromatic heterocyclic group which may have a substituent, and the benzene ring of the compound may have a substituent, and p is a integer ranging from 2 to 10.

[0074] The photosensitive lithographic printing plate of the present invention preferably contains a polymer binder in addition to the above components in the photosensitive layer, for the purpose of improving, e.g. development properties or coating properties, when the photosensitive layer is coated on a substrate.


[0075] Specific examples of the polymer binder include homopolymers and copolymers of, e.g. (meth)acrylic acid, (meth)acrylic ester, (meth)acrylamide, maleic acid, (meth)acrylonitrile, styrene, vinyl acetate, vinylidene chloride and maleimide, and polyethylene oxide, polyvinyl pyrrolidone, polyamide, polyurethane, polyester, polyether, polyethylene terephthalate, acetyl cellulose and polyvinyl butyral.

[0076] Of these binder materials, preferred is a copolymer containing carboxyl groups in its molecule and containing, as copolymerizable components, (meth)acrylic acid and at least one (meth)acrylate which may be substituted, such as methyl (meth)acrylate, ethyl (meth)acrylate, propyl (meth)acrylate, butyl (meth)acrylate, 2-ethylhexyl (meth)acrylate, hydroxyethyl (meth)acrylate or benzyl (meth)acrylate (hereinafter referred to as "carboxyl group-containing copolymer").

[0077] The acid value of the carboxyl group-containing polymer binder preferably ranges from 10 to 250 KOH mg/g, and the weight average molecular weight calculated as polystyrene (hereinafter referred to simply as Mw) preferably ranges from 5,000 to 1,000,000, more preferably from 10,000 to 500,000. Such a polymer binder preferably has unsaturated bonds in its side chains, and a resin obtained by reacting a compound having both epoxy group and unsaturated group with the above carboxyl group-containing copolymer may be mentioned.

[0078] Suitable compounds having both an epoxy group and an unsaturated group include aliphatic epoxy group-containing unsaturated compounds such as allyl glycidyl ether, glycidyl (meth)acrylate, α -ethylglycidyl (meth)acrylate, glycidyl crotonate, glycidyl isocrotonate, crotonyl glycidyl ether, monoalkyl monoglycidyl itaconate, monoalkyl monoglycidyl fumarate or monoalkyl monoglycidyl maleate, or 3,4-epoxycyclohexylmethyl (meth)acrylate. Of these compounds, preferred is allyl glycidyl ether, glycidyl (meth)acrylate or 3,4-epoxycyclohexylmethyl (meth)acrylate, and more preferred is 3,4-epoxycyclohexylmethyl (meth)acrylate.

[0079] Also preferred is a compound having the structural unit (monomer unit) represented by the following formula (V):

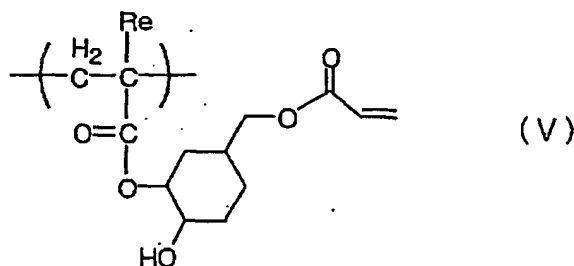

wherein Re is a hydrogen atom or a methyl group.

[0080] Of the above-mentioned resins having both carboxyl groups and double bonds in their side chains, a preferred molecular weight, Mw ranges from 10,000 to 1,000,000, preferably from 20,000 to 500,000. Further, preferred is a resin having from 1 to 50, preferably from 5 to 40 units of double bonds introduced into the side chains based on 100 monomer units of the main chain.

[0081] The photosensitive lithographic printing plate of the present invention preferably contains, in the photosensitive layer, an amine compound having a pKb (dissociation constant) of at most 7 at 25°C or an amino compound having an atomic group [N-CH₂] in its molecule, for the purpose of improving sensitivity to laser light having a wavelength within a range ranging from 390 to 430 nm. The photosensitive lithographic printing plate more preferably contains, in the photosensitive layer, an amine compound having a pKb of at most 7 at 25°C and has the group [N-CH₂] in its molecule.

[0082] The amine compound may be any one of aliphatic, alicyclic and aromatic amines so long as the above conditions are satisfied, and the hydrocarbon group in said amine may have a substituent. Further, the amine compound is not limited to a monoamine, since it may be a polyamine such as a diamine or a triamine, and it may be a primary amine, a secondary amine or a tertiary amine. However, in view of pKb values, an aliphatic amine having a hydrocarbon group which may have a substituent is, much preferred and a tertiary amine is particularly preferred.

[0083] The pKb value of the amine is preferably at most 5. Further, the lower limit of the pKb value is preferably at least 3. Further, an amine having the group [CH₂-N-CH₂] in its molecule is more preferred.

[0084] Specifically, an aliphatic amine which may be replaced with a hydroxyl group or a phenyl group, such as butylamine, dibutylamine, tributylamine, amylamine, diamylamine, triamylamine, hexylamine, dihexylamine, trihexylamine, benzylamine, dibenzylamine, tribenzylamine, triethanolamine, allylamine, diallylamine or triallylamine, may be mentioned.

[0085] As the amine compound for use in the present invention, since it practically has to remain in the photosensitive layer when the photosensitive layer is coated and dried, and since it has to be used without presenting any problems in handling such as odor, a preferred amine compound is one which has a boiling point of at least 80°C under normal pressure, and particularly preferred is one which has a boiling point of at least 150°C and which is solid at room temperature (25°C). Further, a trialkyl amine is preferred since it does not decrease the dispersibility of the coloring pigment. From this viewpoint, and taking availability into consideration, tribenzylamine is a particularly preferred example.

[0086] The reasons for improvement in sensitivity as a result of addition of the amine are believed to be as follows.

(1) The formation of active amino radicals by a chain transfer reaction of an amine with radicals generated in the photopolymerization initiation mechanism or polyacrylate radicals formed by photopolymerization of an acrylate monomer by the action of the radicals.

(2) In a sensitizing step by electron transfer from a light excitation sensitizing agent to a radical generator, the sensitizing agent cation and radical generator anion are formed, but in general, a reverse electron transfer to the pigment cation deactivates the radical generator anion. The amine transfers electron to the sensitizing agent cation and changes the cation to a neutral sensitizing agent, and it thereby suppresses the reverse electron transfer, increases decomposition efficiency of the radical generator anion, and increases the radical generation effect.

(3) The amine significantly increases the elution rate particularly of the non-image portion or a photosensitive layer in an inadequately cured state to an alkali developer at the time of alkali development, and it thereby prevents loss of the photo-set photosensitive layer and increases sensitivity.

[0087] For the photosensitive layer of the photosensitive lithographic printing plate of the second aspect of the present invention, a combination of the above ethylenic monomer, the hexaarylbiimidazole compound (radical generator) and the dialkylaminobenzene compound (sensitizing agent), as the photopolymerization initiation system, or a combination

of the above ethylenic monomer, the titanocene compound (radical generator) and the dialkylaminobenzene compound (sensitizing agent) is essential. The compounding ratio of each component of the composition, based on 100 parts by weight of the ethylenic monomer, is such that the amount of the hexaarylbiimidazole compound preferably ranges from 5 to 60 parts by weight, more preferably from 15 to 40 parts by weight, the amount of the titanocene compound preferably ranges from 1 to 30 parts by weight, more preferably from 5 to 20 parts by weight, and the amount of the dialkylaminobenzene compound preferably ranges from 1 to 30 parts by weight, more preferably from 5 to 20 parts by weight. Further, the compositional ratio of the sensitizing agent to the radical generator is such that the dialkylaminobenzene compound preferably ranges from 0.1 to 5 parts by weight, more preferably from 0.2 to 3 parts by weight, based on 1 part by weight of the hexaarylbiimidazole compound, and the dialkylaminobenzene compound ranges from 0.5 to 6 parts by weight, more preferably from 0.5 to 1.8 parts by weight, based on 1 part by weight of the titanocene compound.

[0088] Further, in the case where the polymerization accelerator (hydrogen-donor compound) is incorporated in the composition for the purpose of improving photopolymerization initiation performance, it is incorporated in an amount preferably ranging from 1 to 50 parts by weight, more preferably from 10 to 40 parts by weight, based on 100 parts by weight of the ethylenic monomer component.

[0089] Further, in the case where the polymer binder is incorporated in the composition, it is incorporated in an amount preferably ranging from 50 to 500 parts by weight, more preferably from 70 to 200 parts by weight, based on 100 parts by weight of the ethylenic monomer.

[0090] The photosensitive layer of the lithographic printing plate to be used in the present invention may contain another substance depending upon the purpose for its use. For example, a coating property-improving agent such as a nonionic, anionic, cationic or fluorine type surface active agent; a thermal polymerization inhibitor such as hydroquinone, p-methoxyphenol or 2,6-di-t-butyl-p-cresol; a coloring pigment of an organic or inorganic dye or pigment (which is different from the above sensitizing agent, which is substantially incompatible with a coating solvent or a photosensitive layer component, and which has no sensitizing function); a plasticizer such as dioctyl phthalate, didodecylphthalate or tricresyl phosphate; a sensitivity properties-improving agent such as a tertiary amine or a thiol; or another additive such as a pigment precursor, an antifoaming agent, a visible image-imparting agent, an adhesion-improving agent, a development property-improving agent or an ultraviolet absorber, may be added.

[0091] With respect to preferred amounts of the above additives based on 100 parts by weight of the ethylenic monomer, the thermal polymerization inhibitor is at most 2 parts by weight, the coloring pigment is at most 20 parts by weight, the plasticizer is at most 40 parts by weight, the pigment precursor is at most 30 parts by weight, and the surface active agent is at most 10 parts by weight.

[0092] Particularly, if the content of the coloring pigment is too high, the performance of the present invention may be inadequate. Accordingly, the content of the coloring pigment is preferably at most 20 wt% of the photosensitive composition.

[0093] The above photosensitive composition is diluted with a proper solvent, and coated and dried on a support to form the photosensitive layer.

[0094] The support which is used in the present invention may be any of the conventional ones used for photosensitive lithographic printing plates, and it may, for example, be a metal plate of, e.g., aluminum, zinc, iron, copper or an alloy thereof, a metal plate having chromium, zinc, copper, nickel, aluminum, iron or the like plated or vapor-deposited thereon, a paper sheet, a plastic film, a glass sheet, a resin-coated paper sheet, a paper sheet having a metal foil such as an aluminum foil bonded thereto, or a plastic film having hydrophilic treatment applied thereto. Among them, preferred is a plate of aluminum or an aluminum alloy (hereinafter referred to as an aluminum support).

[0095] The thickness of the aluminum support is usually ranges from about 0.01 to about 10 mm, preferably from about 0.05 to about 1 mm.

[0096] The surface on at least the photosensitive layer composition side of the aluminum support is subjected to surface roughening, and then an anodic oxidation treatment is conducted. A degreasing treatment, a sealing treatment, an undercoating treatment or the like may further be conducted as the case requires. A degreasing treatment is conducted usually before the surface roughening, and the degreasing treatment is conducted in accordance with a conventional method such as wiping, soaking or steam-washing the support with a solvent, by soaking or spraying the support with an aqueous alkali solution, followed by neutralization with an aqueous acid solution, or by soaking or spraying the support with a surface active agent. Surface roughening may be accomplished by a known such as brush polishing, ball polishing, electrolytic etching, chemical etching, liquid honing or sand blasting, or a combination thereof. Preferred is brush polishing, ball polishing, electrolytic etching, chemical etching or liquid honing.

[0097] The aluminum plate which is surface is further subjected to a desmutting treatment with an aqueous acid or alkali solution as the case requires.

[0098] The desmutting treatment is conducted by soaking the plate in an aqueous solution of an acid such as sulfuric acid, nitric acid, hydrochloric acid, phosphoric acid or chromic acid, or in an aqueous solution of an alkali such as sodium hydroxide, potassium hydroxide, sodium metasilicate, sodium phosphate, sodium pyrophosphate, potassium phosphate or sodium aluminate, or by spraying aqueous solutions onto the plate. The aluminum plate thus obtained

is usually subjected to an anodic oxidation treatment, particularly preferably a treatment with an electrolytic solution containing sulfuric acid. The method of anodic oxidation treatment with an electrolytic solution containing sulfuric acid may be conducted in accordance a known method such as disclosed in JP-A-58-213894. Specifically, it is conducted, for example, at a sulfuric acid content ranging from 5 to 50 wt%, preferably from 15 to 30 wt%, at a temperature ranging from about 5 to about 50°C, preferably from 15 to 35°C, at a current density ranging from 1 to 60 A/dm² for from about 5 to about 60 seconds. Further, as the case requires, the substrate surface may be treated with hot water or with an alkali silicate such as a silicate of soda, or by soaking the plate in an aqueous solution containing an aqueous polymer compound such as polyvinyl phosphonic acid or a resin having a cationic quaternary ammonium group. The thickness of the aluminum support usually from 0.01 to 10 mm, preferably from about 0.05 to about 1 mm, and with respect to the surface roughness, the average roughness Ra as stipulated in JIS B0601 usually ranges from 0.3 to 1.0 μm, preferably from about 0.4 to about 0.8 μm.

[0099] The photosensitive lithographic printing plate used in the present invention is exposed by means of a laser light relatively low exposure. Accordingly, it is effective to leave smut on the surface of the substrate so as to increase the adhesion of the photosensitive composition, within a range not influence such as staining during printing or impairing development properties. The residual amount of the smut preferably ranges from 0.3 to 0.5, more preferably from 0.32 to 0.45, as by the reflection density on the surface the photosensitive composition side. When the reflection ratio is within the above range, printing resistance will improve.

[0100] Further, in the case where the desmutting treatment is conducted, it is preferred to control the desmutting conditions so that $0.01 \leq D-E \leq 0.1$, where D is the reflection density on the surface at the photosensitive composition side immediately after the surface roughening treatment, and E is the reflection density on the surface the photosensitive composition side after the anodic oxidation treatment. More preferably, $0.01 \leq D-E \leq 0.08$.


[0101] The reflection density is measured by means of a reflection densitometer visual mode without using a filter. The desmutting of a surface may be performed by soaking the substrate in an aqueous NaOH solution at a concentration preferably ranging from 0.1 to 4 wt%, at a liquid temperature ranging from about 5 to about 30°C for from about 1 to about 10 seconds, depending on the state of the surface roughening and the aqueous alkali solution used.

[0102] The photosensitive composition may be coated on a surface by a known method such as by dip coating, coating by means of a rod, spinner coating, spray coating or roll coating. The amount coated ranges from 0.5 to 5 g/m². Here, the temperature for drying ranges from about 30 to about 150°C, preferably from about 40 to about 110°C, and the drying time ranges from about 5 seconds to about 60 minutes, preferably from about 10 seconds to about 30 minutes.

[0103] A protective layer (oxygen-shielding layer) is provided on the photosensitive layer in order to prevent polymerization inhibition due to the presence of oxygen. Specific examples of protective layers are those formed from water-soluble polymers such as a polyvinyl alcohol, polyvinyl pyrrolidone, polyethylene oxide and cellulose. Among them, preferred is a polyvinyl alcohol having high oxygen gas barrier properties. It is also preferred to use a polyvinyl alcohol and polyvinyl pyrrolidone in combination, and in this case, preferably from 1 to 20 parts by weight, more preferably from 3 to 15 parts by weight, of polyvinyl pyrrolidone is used based on 100 parts by weight of the polyvinyl alcohol.

[0104] The photosensitive lithographic printing plate of the present invention may be formed in a manner such that the photosensitive layer of a photosensitive composition having a maximum peak of spectral sensitivity outside the wavelength range from 370 to 430 nm, then a protective layer transmission of light is formed on the photosensitive layer so as to form, for example, a layer made of a photosensitive composition having a maximum peak of spectral sensitivity within a wavelength range ranging from 430 to 460 nm, and on photosensitive layer, a protective layer showing absorption within a range ranging from 430 to 500 nm is formed, so that the maximum peak of spectral sensitivity is within a wavelength range ranging from 400 to 420 nm, and the absolute sensitivity is at most 100 μJ/cm² at a wavelength of 410 nm resultingly.

[0105] A preferred aspect of the invention is that the photosensitive composition which constitutes the photosensitive layer in the above case, is one in which the polymerization initiation system is changed, specifically to a combination of the above titanocene compound with a coumarin compound. coumarin pigments as disclosed in e.g. JP-A-6-301208, JP-A-8-146605, JP-A-8-211605, JP-A-8-129258 or JP-A-8-129259. The coumarin pigment is a pigment which has the following skeleton in its structure.



[0106] In the case of forming a photosensitive layer using a photosensitive composition which undergoes photo-

radical polymerization, an oxygen-shielding layer is preferably formed on the photosensitive layer as mentioned above so as to prevent radical polymerization inhibition due to the action of oxygen, and it is possible to employ the oxygen-shielding layer as a protective layer and to adjust the components in the protective layer to adjust the maximum peak of spectral sensitivity as photosensitive lithographic printing plate to within a wavelength range ranging from 400 to 440 nm. The protective layer may contain a water-soluble polymer similar to one in the above oxygen-shielding layer as the main component, and contains a compound which absorbs light having the above desired wavelength.

[0107] The third aspect of the invention of making a printing plate using the photosensitive lithographic printing plate of the present invention is as follows.

[0108] In order to prepare the printing plate of the present invention, the lithographic printing plate of the invention is exposed by means of a laser having a wavelength ranging from 390 to 430 nm, followed by development to remove non-exposed portions of the photosensitive layer to form an image.

[0109] The source of light for image formation is not particularly limited long as it is laser light having an oscillation wavelength ranging from 390 to 430 nm. Preferred is laser light having an oscillation wavelength ranging from 400 to 420 nm, and particularly advantageous is an indium gallium nitride semiconductor laser emitting light having a wavelength in the vicinity of 410 nm.

[0110] Exposure of the photosensitive lithographic printing plate is conducted by employing a laser beam having an oscillation wavelength ranging from 390 to 430 nm, preferably from 400 to 420 nm, as a beam spot having a diameter ranging from 2 to 30 μm , preferably from 4 to 20 μm , at an output light intensity of the laser ranging from 1 to 100 mW, preferably from 3 to 70 mW, and by moving the beam spot at a scanning rate ranging from 50 to 500 m/s, preferably from 100 to 400 m/s.

[0111] Image-exposure is conducted so that exposure of the photosensitive lithographic printing plate (printing plate exposure) to laser light is at most 100 $\mu\text{J}/\text{cm}^2$, preferably at most 50 $\mu\text{J}/\text{cm}^2$. The lower limit is preferably as low as possible, but is usually at least 1 $\mu\text{J}/\text{cm}^2$, and is practically at least 5 $\mu\text{J}/\text{cm}^2$.

[0112] Further, the higher the scanning density upon exposure, the greater the high-definition image formation. Accordingly, the scanning density is preferably at least 2,000 dpi, more preferably at least 4,000 dpi.

[0113] The photosensitive lithographic printing plate of the present invention is image-exposed by means of the above light source, followed by development of the image with an aqueous developer consisting mainly of water, preferably with an aqueous solution containing a surface active agent and an alkali component.

[0114] The aqueous solution may further contain an organic solvent or a buffering agent. A preferred buffering agent is an alkali component such as an inorganic alkali such as sodium silicate, potassium silicate, sodium hydroxide, potassium hydroxide, lithium hydroxide, tribasic sodium phosphate, dibasic sodium phosphate, sodium carbonate, potassium carbonate and sodium bicarbonate, an organic amine compound such as trimethylamine, diethylamine, isopropylamine, n-butylamine, monoethanolamine, diethanolamine and triethanolamine. These compounds may be used alone or in combination. The pH of the alkali developer usually ranges from about 9 to about 14, preferably from 11 to 14.

[0115] Surface active agents include a nonionic surface active agent such as a polyoxyethylene alkyl ether, a polyoxyethylene alkyl aryl ether, a polyoxyethylene alkyl ester, a sorbitan alkyl ester or a monoglyceride alkyl ester, an anionic surface active agent such as an alkyl benzene sulfonate, an alkyl naphthalene sulfonate, an alkyl sulfate, an alkyl sulfonate or a sulfosuccinate, or an ampholytic surface active agent such as an alkyl betaine or an amino acid. Further, suitable organic solvents include isopropyl alcohol, benzyl alcohol, ethyl cellosolve, butyl cellosolve, phenyl cellosolve, propylene glycol and diacetone alcohol.

[0116] The method of development employed is not particularly limited, and may be conducted by soaking and shaking the plate in a developer, physically removing non-image portions which is at the point of being dissolved in a developer by means of e.g. a brush, or spraying a developer onto the plate so as to remove non-image portions. The time for development is selected depending upon the above method used so that the non-image portions can adequately be removed, and is optionally selected within a range of 5 seconds to 10 minutes.

[0117] After the development, the plate may be subjected to a hydrophilic treatment by means of, e.g., gum arabic optionally applied to the printing plate as the case requires. Further, the oxygen-shielding layer may be initially washed with water before development as the case requires.

[0118] Having now generally described this invention, a further understanding can be obtained by reference to certain specific examples which are provided herein for purposes of illustration only and are not intended to be limiting unless otherwise specified.

Preparation of an aluminum support (1)

[0119] An aluminum plate having a thickness of 0.3 mm was degreased with a 3 wt% aqueous sodium hydroxide solution, subjected to electrolytic etching in a hydrochloric acid bath of 11.5 g/l at 25°C at a current density of 80 A/dm² for 11 seconds, and washed with water. Then, the plate was subjected to anodic oxidation in a sulfuric acid bath of 30 wt% at 30°C at 11.5 A/dm² for 15 seconds, washed with water and dried to prepare an aluminum plate as a

lithographic printing plate (hereinafter referred to simply as support (1)).

Preparation of an aluminum support (2)

[0120] An aluminum plate (thickness: 0.24 mm) was degreased with a 3 wt% aqueous sodium hydroxide solution, and subjected to electrolytic etching in a nitric acid bath of 18.0 g/l at 25°C at a current density of 90 A/dm² for 11 seconds. Then, the plate was subjected to desmutting in a 4.5 wt% aqueous sodium hydroxide solution at 30°C for 2 seconds, neutralized in a 10 wt% aqueous nitric acid solution at 25°C for 5 seconds, washed with water, and then subjected to an anodic oxidation treatment in a nitric acid bath of 30 wt% at 30°C at a current density of 10 A/dm² for 16 seconds, and washed with water and dried to prepare a support.

[0121] The reflection density of the support (measured by a reflection densitometer (RD-918 manufactured by Macbeth) was 0.32. Further, during this production step, A-B=0.08 (where A is the reflection density on the surface at the photosensitive composition side immediately after the surface roughening treatment, and B is the reflection density on the surface at the photosensitive composition side immediately before the anodic oxidation treatment).

[0122] Hereinafter the support thus obtained will be referred to simply as "support (2)".

EXAMPLES 1 to 15 and COMPARATIVE EXAMPLES 1 to 5

[0123] A coating fluid of the following photosensitive composition was coated onto support (1) by means of a bar coater and dried so that the dried film thickness became 2 g/m² (drying condition: 170°C, 2 minutes). Further, the following protective layer coating fluid (1) was coated thereon by means of a bar coater and dried so that the dried film thickness became 3 g/m² (drying condition: 170°C, 2 minutes) to prepare a photosensitive lithographic printing plate.

Protective layer coating fluid (1)

[0124]

Polyvinyl alcohol (GL-03 manufactured by Nippon Synthetic Chemical Industry Co., Ltd.)	90 parts by weight
Polyvinyl pyrrolidone (Mw=4,000)	5 parts by weight
Water	1,000 parts by weight

Photosensitive composition coating fluid

[0125]


Radical generator (compound as identified in Table 1)	Amount as shown in Table 1
Sensitizing agent (compound as identified in Table 1)	Amount as shown in Table 1
Polymer binder (the following compound P-1)	45 parts by weight
Ethylenic monomer 1 (the following compound E-1)	Amount as shown in Table 1
Ethylenic monomer 2 (the following compound E-2)	22 parts by weight
Ethylenic monomer 3 (the following compound E-3)	Amount as shown in Table 1
Ethylenic monomer 4 (the following compound E-4)	Amount as shown in Table 1
2-mercaptobenzothiazole	5 parts by weight
N-phenylglycine benzylester	Amount as shown in Table 1
Tribenzylamine	Amount as shown in Table 1
Copper phthalocyanine pigment (visible image agent)	4 parts by weight
Emulgen 104 P (surface active agent, manufactured by Kao Corporation)	2 parts by weight
S-381 (fluorine type surface active agent, manufactured by Asahi Glass Company, Limited)	0.3 part by weight
Disperbyk 161 (dispersing agent, manufactured by Big Chemie)	2 parts by weight
Propylene glycol monomethyl ether acetate	400 parts by weight
Cyclohexanone	740 parts by weight

[0126] Among the components of the photosensitive composition, the structures of the radical generator, the sensitizing agent, the polymer binder and the ethylenic monomer are as follows:


Radical generator

[0127]


R - 1 :

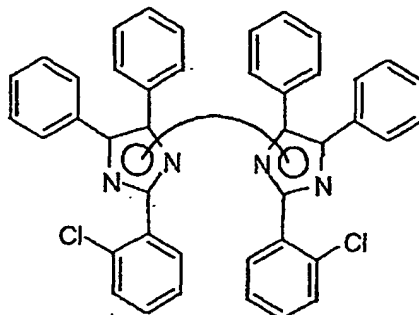

R - 2 :

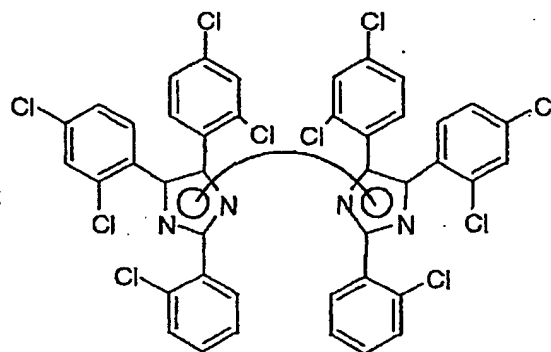


R - 3 :

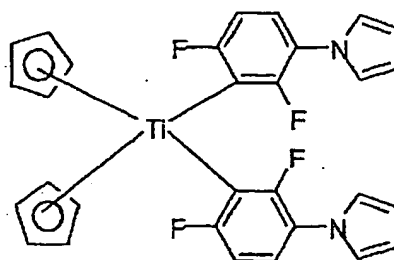


Sensitizing agent

[0128]


S - 1 :



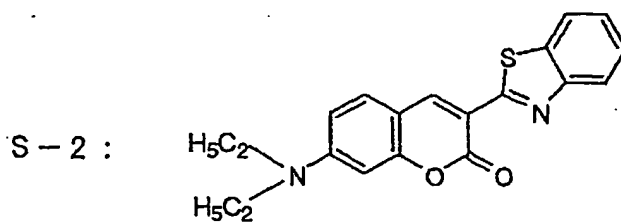

Polymer binder




[0129]

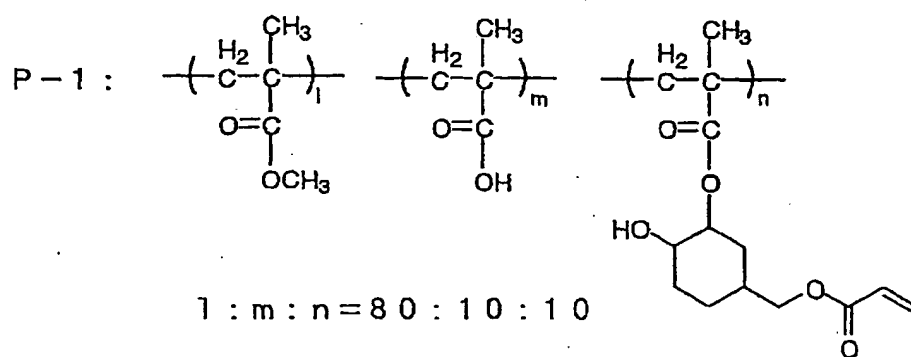


Ethylenic monomer

[0130]


E-1.:

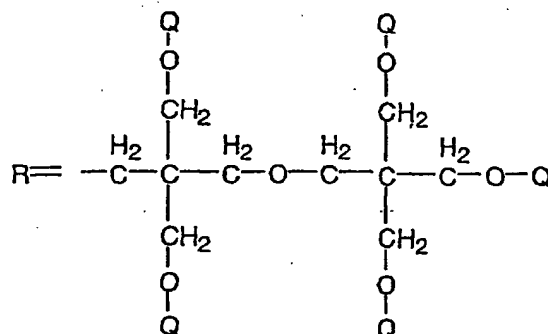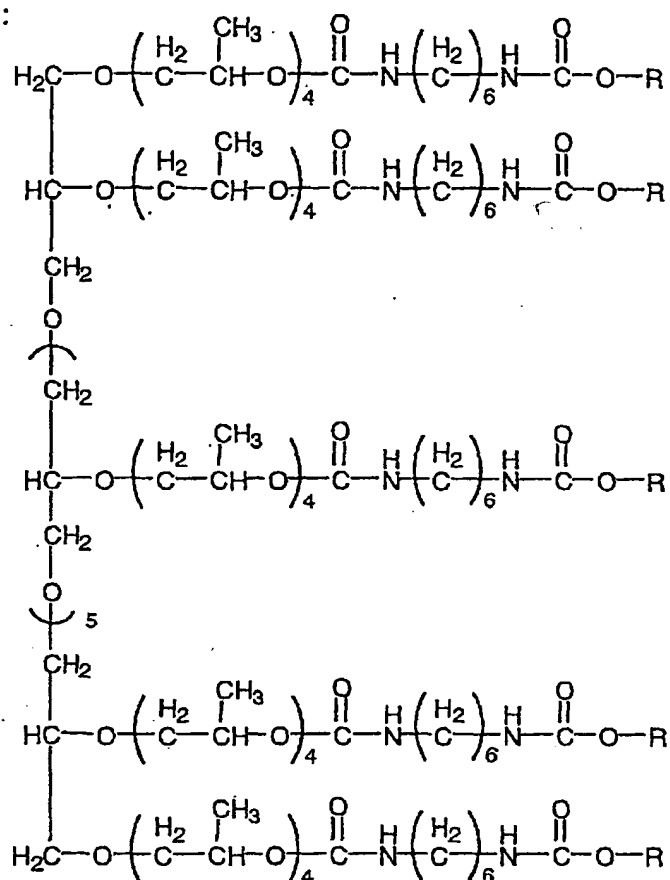


E - 2 :



E - 3 : A 1:1 mixture of

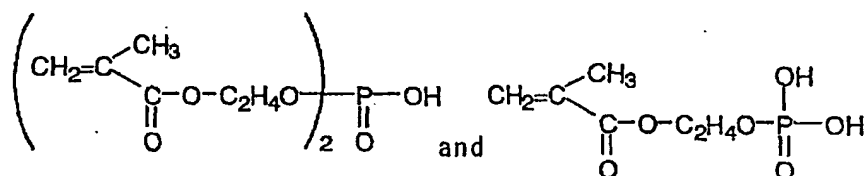

E - 4 :



[0131] The obtained photosensitive lithographic printing plate for violaceous laser exposure was evaluated with respect to the following items. The results are shown in Table 1.

Evaluation of sensitivity

[0132] The photosensitive lithographic printing plate was cut into a size of 50×60 mm, and the photosensitive material sample was irradiated for 10 seconds with a light of which light intensity logarithmically decreased in the vertical axis, and the light wavelength linearly decreased in the horizontal axis, as determined by means of a diffraction spectral irradiation apparatus (RM-23, manufactured by Narumi K.K.) equipped with xenon lamp U1-501C (1 kW: manufactured by Ushio Inc.) as a light source. The exposed sample was soaked in an aqueous solution containing 0.7 wt% of sodium carbonate and 0.5 wt% of an anionic surface active agent (Pelex NBL, manufactured by Kao Corporation) at 28°C for 30 seconds to develop the image. After development, the minimum amount of exposure energy required for photocuring by light radiation of 410 nm was calculated from the height of the cured image obtained. The smaller amount of energy, the higher the sensitivity.

S410/S450

[0133] The photosensitive material sample was exposed and developed in the same manner as described in the above evaluation of sensitivity, whereupon the minimum exposure energy S410 ($\mu\text{J}/\text{cm}^2$) at a wavelength of 410 nm and the minimum exposure energy S450 ($\mu\text{J}/\text{cm}^2$) at a wavelength of 450 nm were obtained to calculate the ratio (S410/S450).

[0134] Here, the symbols A to D in the column of minimum exposure energy in Table 1 represent the following.

A: S410/S450 is at most 0.03

- B: S410/S450 exceeds 0.03 and is at most 0.1
- C: S410/S450 exceeds 0.1 and is at most 0.5
- D: S410/S450 exceeds 0.1

5 [0135] The smaller the ratio, the better the safe light properties under a yellow lamp.

Maximum peak of spectral sensitivity

10 [0136] The photosensitive material sample was exposed and developed in the same manner as described in the above evaluation of sensitivity, whereupon a spectral sensitivity curve was obtained with the horizontal axis indicating the exposure wavelength and the vertical axis indicating the inverse of the minimum exposure energy (sensitivity) at the wavelength indicated by the horizontal axis, and from the spectral sensitivity curve, a wavelength showing the maximum peak of spectral sensitivity was obtained. Here, the exposure wavelength was changed from 350 nm to 650 nm.

15 Safe light properties under a yellow lamp

20 [0137] The photosensitive lithographic printing plate was cut into a size of 30×30 mm, and each sample was left to stand under a yellow lamp (under the condition of being shielded from light having wavelengths of at most about 470 nm) for 1 minute, 2 minutes, 5 minutes, 10 minutes, 20 minutes, 30 minutes or 40 minutes, followed by development in the same manner as described above, to obtain the maximum time for which the photosensitive composition left to stand under a yellow lamp would not cure (evaluation of 40 minutes at the most).

[0138] Here, symbols A to D in the column of safe light properties in Table 1 mean the following.

- 25 A: At least 20 minutes
- B: At least 10 minutes and less than 20 minutes
- C: At least 1 minute and less than 10 minutes
- D: Less than 1 minute

30 **EXAMPLE 15**

[0139] A photosensitive lithographic printing plate was prepared in the same manner as described in Example 12 by successively coating and drying the photosensitive composition coating fluid and the protective layer coating fluid, except that the support (2) was used instead of the support (1), and evaluations were conducted in the same manner.
35 The results are shown in Table 1.

40

45

50

55

Table 1

	Radical generator (part by weight)	Sensitizing pigment (part by weight)	Absorption maximum (nm)	Amount of ethylenic monomer-1 (part by weight)	Amount of ethylenic monomer-3 (part by weight)	Amount of ethylenic monomer-4 (part by weight)	Amount of N-phenylglycine benzyl ester (part by weight)	Amount of tribenzylamine (part by weight)	S410 ($\mu\text{J}/\text{cm}^2$)	S410/S450	Safe light properties
Ex. 1	R-1 (15)	S-1 (9)	410	(22)	(11)	(0)	(5)	(3)	14	0.026	20 min.
Ex. 2	R-1 (10)	S-1 (6)	410	(22)	(11)	(0)	(5)	(3)	15	B	40 min.
Ex. 3	R-3 (5)	S-1 (3)	410	(22)	(11)	(0)	(5)	(3)	18	C	40 min.
Ex. 4	R-1 (10)	S-1 (6)	410	(22)	(11)	(0)	(5)	(0)	22	B	40 min.
Ex. 5	R-1 (10)	S-1 (6)	410	(0)	(11)	(33)	(5)	(3)	24	B	40 min.
Ex. 6	R-2 (15)	S-1 (9)	410	(0)	(11)	(22)	(5)	(0)	24	0.026	30 min.
Ex. 7	R-2 (15)	S-1 (6)	410	(0)	(11)	(22)	(5)	(0)	24	0.038	30 min.
Ex. 8	R-2 (10)	S-1 (6)	410	(0)	(11)	(22)	(5)	(0)	30	0.032	40 min.
Ex. 9	R-2 (5)	S-1 (6)	410	(0)	(11)	(22)	(5)	(0)	43	At most 0.021 ^{1,2}	40 min.
Ex. 10	R-1 (5)	S-1 (4.5)	410	(0)	(11)	(22)	(5)	(0)	54	At most 0.027 ^{1,2}	40 min.

Table 1 (continued)

	Radical generator (part by weight)	Sensitizing pigment (part by weight)	Absorption maximum (nm)	Amount of ethylenic monomer-1 (part by weight)	Amount of ethylenic monomer-3 (part by weight)	Amount of ethylenic monomer-4 (part by weight)	Amount of N-phenylglycine benzyl ester (part by weight)	Amount of tribenzylamine (part by weight)	S410 (mJ/cm ²)	S410/S450	Safe light properties
Ex. 11	R-3 (5)	S-1 (3)	410	(0)	(11)	(22)	(5)	(0)	54	0.38	1 min.
Ex. 12	R-1 (15)	S-1 (9)	410	(11)	(6)	(22)	(3)	(5)	15	A	A
Ex. 13	R-1 (15)	S-1 (9)	410	(11)	(6)	(22)	(8)	(3)	22	A	A
Ex. 14	R-3 (15)	S-1 (9)	410	(11)	(6)	(22)	(8)	(0)	27	A	A
Comp. Ex. 1	R-3 (5)	S-2 (3)	450	(0)	(11)	(22)	(5)	(0)	24	2.25	Nil
Comp. Ex. 2	R-2 (15)	S-4 (9)	Not measured	(0)	(11)	(22)	(5)	(0)	P ³	-	-
Comp. Ex. 3	R-2 (15)	S-4 (9)	Not measured	(22)	(11)	(0)	(5)	(3)	P ³	-	-
Comp. Ex. 4	R-3 (5)	S-2 (3)	450	(22)	(11)	(0)	(5)	(3)	14	D	D
Comp. Ex. 5	R-3 (5)	S-2 (3)	450	(0)	(11)	(33)	(5)	(3)	21	D	D
Ex. 15	R-1 (15)	S-1 (9)	410	(11)	(6)	(22)	(3)	(5)	15	A	D

*1: "Nil" means that the plate was cured after having been left to stand for 1 minute.

*2: It was impossible to form an image with an energy of about 2,000 $\mu\text{J}/\text{cm}^2$ by exposure at a wavelength of 450 nm under the above conditions.

*3: "F" means that it was impossible to form an image with an energy of about 2,000 $\mu\text{J}/\text{cm}^2$ by exposure at a wavelength of 410 nm under the above conditions.

[0140] From the evaluation above of spectral sensitivity, the minimum exposure for image formation for each of the photosensitive material samples of Examples 1 to 15 at a wavelength longer than 450 nm was higher than the value at a wavelength of 450 nm. On the other hand, the minimum exposure for image formation for the photosensitive material sample of Comparative Example 1 at a wavelength longer than 450 nm was higher than the value at a wavelength of 450 nm. Further, each of the photosensitive layers of Examples 1 to 15 showed a maximum peak at 410 nm within a range ranging from 350 to 650 nm.

EXAMPLE 16

[0141] A photosensitive lithographic printing plate prepared in the same manner as described in Example 1 was image-exposed by means of a 410 nm violaceous laser printing plate exposure apparatus (Cobalt 8) manufactured by Escher Glad at a laser light output of 0.5 mW with a laser beam spot diameter of 12 μm at a scanning density of 5,080 dpi at a scanning rate of 167 m/s. The image-exposed photosensitive lithographic printing plate was developed in the same manner as described in Example 1, whereupon a print having a high quality image was obtained. The printing plate exposure energy was 30 $\mu\text{J}/\text{cm}^2$.

[0142] With respect to a photosensitive lithographic printing plate prepared in the same manner as described in Examples 1 to 15, an image can be formed by image exposure in the same manner as described in Example 16 by means of a 410 nm violaceous laser printing plate exposure apparatus (Cobalt 8) manufactured by Escher Glad at a laser light output of 0.5 mW with a laser beam spot diameter of 12 μm , at a scanning density of 5,080 dpi at a scanning rate of 167 m/s, followed by development.

[0143] The photosensitive lithographic printing plate of the present invention is highly sensitive upon exposure to laser light ranging from 390 to 430 nm, and accordingly an image can efficiently be formed by means of laser light ranging in wavelength from 390 to 430 nm.

[0144] Further, as a preferred embodiment, the composition exhibits excellent safe light properties under a yellow lamp and exhibits excellent handling efficiency.

[0145] The disclosures of Japanese Patent Application Nos. 2000-117803 filed on April 19, 2000; 2000-131995 filed on May 1, 2000; 2000-131996 filed on May 1, 2000; 2000-364310 filed on November 30, 2000; 2000-368412 filed on December 4, 2000; 2000-369415 filed on December 5, 2000 and 2001-016537 filed on January 25, 2001, including specification, claims, drawings and summary are incorporated herein by reference.


[0146] Obviously, numerous modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically described herein.

Claims

1. A photosensitive lithographic printing plate comprising a photosensitive layer and a protective layer formed in this order on a support, wherein said photosensitive layer has a maximum peak of spectral sensitivity within the wavelength range of 390 to 430 nm, the minimum exposure for said photosensitive lithographic printing plate for image formation at a wavelength of 410 nm (S410) is at most 100 $\mu\text{J}/\text{cm}^2$, and the relation between the minimum exposure

for image formation at a wavelength of 450 nm (S450) and the minimum exposure for image formation at a wavelength of 410 nm (S410) is $0 < S410/S450 \leq 0.1$.


2. The photosensitive lithographic printing plate according to Claim 1, wherein the minimum exposure for image formation at each wavelength exceeding 450 nm and at most 650 nm is higher than the minimum exposure for image formation at a wavelength of 450 nm (S450).
3. The photosensitive lithographic printing plate according to Claim 2, wherein the maximum peak of spectral sensitivity within the wavelength range of 390 to 430 nm is the maximum peak of spectral sensitivity within the wavelength range of 350 to 650 nm.
4. The photosensitive lithographic printing plate according to Claim 1, wherein said photosensitive layer contains (A) an ethylenic monomer, (B) a sensitizing agent and (C) a radical generator.
5. A photosensitive lithographic printing plate comprising a photosensitive layer and a protective layer formed in this order on a support, said photosensitive layer containing (A) an ethylenic monomer, (B) a sensitizing agent and (C) a radical generator, wherein the radical generator (C) contains a hexaarylbiimidazole compound or a titanocene compound, and the sensitizing agent (B) contains a dialkylaminobenzene compound.
6. The photosensitive lithographic printing plate according to Claim 5, wherein the minimum exposure for image formation at a wavelength of 410 nm (S410) is at most $100 \mu\text{J}/\text{cm}^2$.
7. The photosensitive lithographic printing plate according to Claim 4 or 5, wherein the radical generator (C) contains a hexaarylbiimidazole compound, and the sensitizing agent (B) contains a dialkylaminobenzene compound.
8. The photosensitive lithographic printing plate according to Claim 4 or 5, wherein the radical generator (C) contains a titanocene compound, and the sensitizing agent (B) contains a dialkylaminobenzene compound.
9. The photosensitive lithographic printing plate according to Claim 1 or 5, wherein the photosensitive layer contain a coloring pigment in an amount greater than 0 up to 20 wt%, based on the weight of the composition.
10. The photosensitive lithographic printing plate according to Claim 7, wherein the hexaarylbiimidazole compound is present in an amount ranging from 15 to 40 parts by weight based on 100 parts by weight of the ethylenic monomer.
11. The photosensitive lithographic printing plate according to Claim 1 or 5, wherein the photosensitive layer further comprises a polymer binder.
12. The photosensitive lithographic printing plate according to Claim 11, wherein the polymer binder contains a structural unit represented by the following formula (V):

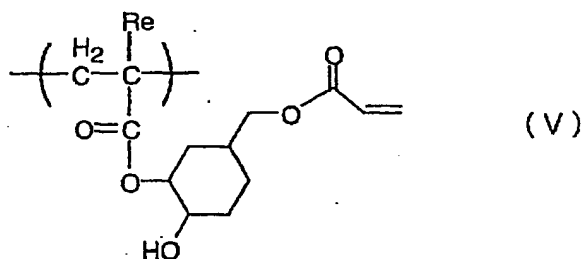

wherein Re is a hydrogen atom or a methyl group.

13. The photosensitive lithographic printing plate according to Claim 4 or 5, wherein the photosensitive layer further comprises a hydrogen-donor compound.

14. The photosensitive lithographic printing plate according to Claim 4 or 5, wherein the photosensitive layer further comprises an amine compound having a pKb of at most 7 at 25°C.
15. The photosensitive lithographic printing plate according to Claim 4 or 5, wherein the photosensitive layer further comprises an amine compound having the group [N-CH₂].
16. The photosensitive lithographic printing plate according to Claim 4 or 5, wherein the photosensitive layer contains, as the ethylenic monomer, a urethane compound (a3) having at least four urethane linkages and at least four addition-polymerizable double bonds in one molecule.
17. The photosensitive lithographic printing plate according to Claim 16, wherein the urethane compound (a3) has a molecular weight ranging from 600 to 200,000.
18. The photosensitive lithographic printing plate according to Claim 16, wherein the urethane compound (a3) is represented by the following formula (II):



wherein x is an integer ranging from 4 to 20, y is an integer ranging from 0 to 15, z is an integer ranging from 1 to 15, Ra is a group having a repeating unit derived from alkyleneoxy or aryleneoxy, and having from 4 to 20 oxy groups capable of combining with Rb, each of Rb and Rc, which are independent of each other, is a C₁₋₁₀ alkylene group, and Rd is an organic residue having from 1 to 10 (meth)acrylic group, provided that each of Ra, Rb, Rc and Rd which are independent of one another, may have a substituent.

19. The photosensitive lithographic printing plate according to Claim 4 or 5, wherein the urethane compound (a3) as the ethylenic monomer (A), is prepared by reacting a compound having at least four active isocyanate groups in one molecule (a1) with a compound having at least one hydroxyl group and at least two addition-polymerizable double bonds in one molecule (a2).
20. The photosensitive lithographic printing plate according to Claim 19, wherein the compound (a1) having at least four active isocyanate groups in one molecule has a molecular weight of at least 500.
21. The photosensitive lithographic printing plate according to Claim 4 or 5, wherein the photosensitive layer contains, as the ethylenic monomer (A), a phosphate compound having an acryloyloxy group or a methacryloyloxy group.
22. The photosensitive lithographic printing plate according to Claim 4 or 5, wherein the photosensitive layer further comprises a surface active agent.
23. The photosensitive lithographic printing plate according to Claim 1 or 5, wherein the protective layer contains a polyvinyl alcohol.
24. The photosensitive lithographic printing plate according to Claim 1 or 5, wherein the protective layer contains polyvinyl pyrrolidone.
25. The photosensitive, lithographic printing plate according to Claim 1 or 5, wherein the support is prepared by subjecting a plate made of aluminum or an aluminum alloy to surface roughening, and said support has a reflection density of at least 0.3.
26. The photosensitive lithographic printing plate according to Claim 1 or 5, wherein the support is prepared by subjecting a plate made of aluminum or an aluminum alloy to surface roughening and to an anodic oxidation treatment, and satisfies the relation $D-E \leq 0.1$, where D is the reflection density immediately after the surface roughening treatment, and E is the reflection density after the anodic oxidation treatment.

27. A method for making a printing plate, which comprises:

5 image-exposing the photosensitive lithographic printing plate as defined in Claim 1 or 5 by means of laser light having a wavelength ranging from 390 to 430 nm; and
developing the exposed plate with an aqueous developer.

28. The method for making a printing plate according to Claim 27, wherein the wavelength of the laser light ranges from 400 to 420 nm.

10 29. The method for making a printing plate according to Claim 27, wherein the scanning density of the laser light is at least 4,000 dpi.

30. The method for making a printing plate according to Claim 27, wherein the scanning rate of the laser light ranges from 50 to 500 m/s.

15 31. The method for making a printing plate according to Claim 27, wherein the printing plate exposure energy in the image exposure is at most 50 $\mu\text{J}/\text{cm}^2$.

20 32. The method for making a printing plate according to Claim 27, wherein the aqueous developer contains an alkali component.

33. The method for making a printing plate according to Claim 27, wherein the aqueous developer contains a surface active agent.



European Patent
Office

PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 45 of the European Patent Convention shall be considered, for the purposes of subsequent proceedings, as the European search report

EP 01 10 9621

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.C1.7)
X	EP 0 985 683 A (FUJI PHOTO FILM CO., LTD.) 15 March 2000 (2000-03-15) * page 2, line 38 - line 42 * * page 31, line 40 * * page 33, line 19 - line 20 * * page 39; examples 1-17, 1-18, 1-29 * ---	1-6, 8, 9, 11, 22-28, 32, 33	G03F7/029 G03F7/031
A	EP 0 793 145 A (MITSUBISHI CHEMICAL COMPANY) 3 September 1997 (1997-09-03) * page 11, line 21 - line 22 * * page 12, line 22 * * page 12, line 40 - line 53 * * page 13, line 9 * * page 14, line 23 * * page 14, line 40 - line 50 * * page 15; table 1 * --- -/--	1-33	
			TECHNICAL FIELDS SEARCHED (Int.C1.7)
			G03F
INCOMPLETE SEARCH			
<p>The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC to such an extent that a meaningful search into the state of the art cannot be carried out, or can only be carried out partially, for these claims.</p> <p>Claims searched completely:</p> <p>Claims searched incompletely:</p> <p>Claims not searched:</p> <p>Reason for the limitation of the search: see sheet C</p>			
Place of search		Date of completion of the search	Examiner
THE HAGUE		26 July 2001	Dupart, J.-M.
CATEGORY OF CITED DOCUMENTS		<p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons A: technological background O: non-written disclosure P: intermediate document A: member of the same patent family, corresponding document</p>	
<p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p>			

EPO FORM 1503 03.92 (P04C07)



European Patent
Office

INCOMPLETE SEARCH
SHEET C

Application Number
EP 01 10 9621

Claim(s) searched completely:
5,6

Claim(s) searched incompletely:
1-4,7-33

Reason for the limitation of the search:

Claims searched incompletely: 1-4,7-33:

Present claims 1-3 relate to a photosensitive lithographic printing plate defined by reference to a series of desirable characteristics or properties, namely:

- (1) the photosensitive layer has a maximum peak of spectral sensitivity within a wavelength range of 390-430 nm;
- (2) the minimum exposure for image formation at a wavelength of 410 nm (S410) is at most 100 microJ/cm²;
- (3) the relation between S450 and S410 is $0 < S410/S450 < \text{or} = 0.1$;
- (4) the minimum exposure for image formation at each wavelength exceeding 450 nm and at most 650 nm is higher than S450;
- (5) the maximum peak of spectral sensitivity within the wavelength range of 390 to 430 nm is the maximum peak of spectral sensitivity of 350 to 650 nm.

Present claims 1-3 cover all photosensitive lithographic printing plates having these characteristics or properties, whereas the application provides support within the meaning of Article 84 EPC and/or disclosure within the meaning of Article 83 EPC for only a very limited number of printing plates. In the present case, the claims so lack support, and the application so lacks disclosure, that a meaningful search over the whole of the claimed scope is impossible. Independent of the above reasoning, the claims also lack clarity (Article 84 EPC). An attempt is made to define the lithographic printing plates by reference to results to be achieved. Again, this lack of clarity in the present case is such as to render a meaningful search over the whole of the claimed scope impossible.

In present claim 4 an attempt is made to define the constituency of the photosensitive layer. However, it is clear from the description on page 38, lines 8-17, that the specific photopolymerization initiation system of claim 5 is essential to the definition of the invention. Since claim 4 does not contain this specific feature, it does not meet the requirement of Article 84 EPC and cannot be taken as a basis for a full search.

Consequently, the search has been carried out for those parts of the claims which appear to be clear, supported and disclosed, namely those parts relating to the photosensitive lithographic printing plates of claim 1 restricted to a photosensitive layer according to present claim 5.



European Patent
Office

PARTIAL EUROPEAN SEARCH REPORT

Application Number

EP 01 10 9621

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
A	DATABASE WPI Section Ch, Week 200021 Derwent Publications Ltd., London, GB; Class A89, AN 2000-241258 XP002173155 & JP 2000 056457 A (MITSUBISHI CHEM CORP), 25 February 2000 (2000-02-25) * abstract *	1-33	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)

EPO FORM 1503 03.92 (p4/C10)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 9621

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-07-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0985683 A	15-03-2000	JP 2000098605 A JP 2000147763 A	07-04-2000 26-05-2000
EP 0793145 A	03-09-1997	DE 69703941 D JP 10010719 A US 5800965 A	01-03-2001 16-01-1998 01-09-1998
JP 2000056457 A	25-02-2000	NONE	

EPC FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.